

Orbit Determination of High-Earth-Orbit Satellites by Satellite Laser Ranging

Hyungjik Oh¹, Eunseo Park², Hyung-Chul Lim², Sang-Ryool Lee³, Jae-Dong Choi³,
Chandeok Park^{1†}

¹Department of Astronomy, Yonsei University, Seoul 03722, Korea

²Korea Astronomy and Space Science Institute, Daejeon 34055, Korea

³Korea Aerospace Research Institute, Daejeon 34133, Korea

This study presents the application of satellite laser ranging (SLR) to orbit determination (OD) of high-Earth-orbit (HEO) satellites. Two HEO satellites are considered: the Quasi-Zenith Satellite-1 (QZS-1), a Japanese elliptical-inclined-geosynchronous-orbit (EIGSO) satellite, and the Compass-G1, a Chinese geostationary-orbit (GEO) satellite. One week of normal point (NP) data were collected for each satellite to perform the OD based on the batch least-square process. Five SLR tracking stations successfully obtained 374 NPs for QZS-1 in eight days, whereas only two ground tracking stations could track Compass-G1, yielding 68 NPs in ten days. Two types of station bias estimation and a station data weighting strategy were utilized for the OD of QZS-1. The post-fit root-mean-square (RMS) residuals of the two week-long arcs were 11.98 cm and 10.77 cm when estimating the biases once in an arc (MBIAS). These residuals were decreased significantly to 2.40 cm and 3.60 cm by estimating the biases every pass (PBIAS). Then, the resultant OD precision was evaluated by the orbit overlap method, yielding three-dimensional errors of 55.013 m with MBIAS and 1.962 m with PBIAS for the overlap period of six days. For the OD of Compass-G1, no station weighting strategy was applied, and only MBIAS was utilized due to the lack of NPs. The post-fit RMS residuals of OD were 8.81 cm and 12.00 cm with 49 NPs and 47 NPs, respectively, and the corresponding three-dimensional orbit overlap error for four days was 160.564 m. These results indicate that the amount of SLR tracking data is critical for obtaining precise OD of HEO satellites using SLR because additional parameters, such as station bias, are available for estimation with sufficient tracking data. Furthermore, the stand-alone SLR-based orbit solution is consistently attainable for HEO satellites if a target satellite is continuously trackable for a specific period.

Keywords: high-Earth-orbit (HEO) satellite, orbit determination (OD), orbit overlap, satellite laser ranging (SLR)

1. INTRODUCTION

Since the first laser measurement of an artificial satellite made by the National Aeronautics and Space Administration (NASA) Goddard Space Flight Center (GSFC) in 1964, satellite laser ranging (SLR) has been one of the most precise range measurement techniques applicable to orbit determination (OD) of satellites (Plotkin et al. 1965). The single-shot accuracy of SLR over a single pass is about 5-50 mm, and the root-mean-square (RMS) of normal point (NP) data is known to have millimeter precision (Montenbruck & Gill 2000; Appleby

et al. 2016). The SLR technique has been combined with other satellite tracking systems, such as the global positioning system (GPS), and the stand-alone SLR-based OD solution has been used for verification of satellite orbits estimated from microwave measurements to acquire centimeter-level bias for the global navigation satellite system (GLONASS) satellite network (Urschl et al. 2005, 2007) and also has obtained a 20-40 cm difference from the international global navigation satellite system (GNSS) service (IGS) orbit for a GPS satellite (Zhu et al. 1997). A comparison between the SLR orbit and the precision orbit ephemeris (POE) by the Jet

© This is an Open Access article distributed under the terms of the Creative Commons Attribution Non-Commercial License (<https://creativecommons.org/licenses/by-nc/3.0/>) which permits unrestricted non-commercial use, distribution, and reproduction in any medium, provided the original work is properly cited.

Received 13 SEP 2017 Revised 24 NOV 2017 Accepted 27 NOV 2017

†Corresponding Author

Tel: +82-2-2123-5692, E-mail: park.chandeok@yonsei.ac.kr

ORCID: <https://orcid.org/0000-0002-1616-6780>

Propulsion Laboratory (JPL) showed a difference of less than 1 m for the TOPEX/POSEIDON and CHAMP satellites (Kim et al. 2009). Also, SLR-based OD has been performed for low-Earth-orbit (LEO) satellite with no GPS receiver (Kim et al. 2015). As many countries are developing their own satellite navigation system, such as the Chinese Compass/Beidou, Japanese quasi-zenith satellite system (QZSS), and Indian regional navigation satellite system (IRNSS), along with GPS and GLONASS, the SLR-based OD solution is being actively utilized for quality assessment of orbit precision (Otsubo et al. 2001; Montenbruck et al. 2013; Maier et al. 2015; Sośnica et al. 2015).

Although most SLR target satellites are located below mid-Earth-orbit (MEO), SLR tracking of high-Earth-orbit (HEO) satellites remains challenging. Because of the limited orbit coverage of HEO satellites, the number of SLR tracking data is usually not sufficient, in contrast to the case of LEO satellites. Also, the laser intensity of some existing SLR tracking stations is not sufficient to observe HEO satellites because of the long distance between ground tracking stations and the target satellite. Furthermore, the bin size of NP data for HEO satellites is 300 sec, whereas MEO satellites, such as Laser Geodynamics Satellite -1 and -2 (LAGEOS-1, LAGEOS-2), have a bin size of 120 sec due to their relatively lower altitudes. This difference in bin size is prevalent because more condensing time of raw data points is required to generate the NP data for satellites at higher altitude, and this causes a relative decrease in the number of NP data of HEO satellites for the same tracking period compared with the case of MEO or LEO satellites. These problems lead to a lack of SLR tracking data, which makes it difficult to obtain a consistently precise OD solution for HEO satellites. Nevertheless, because the signal of GNSS, which is conventionally used to track Earth-orbiting satellites, cannot easily reach HEO satellites due to its limited coverage, OD based solely on SLR should be useful for HEO satellites.

Given this critical situation, this research performed parametric studies for precise SLR-based OD of HEO satellites. Two HEO satellites were selected: Quasi-Zenith Satellite-1 (QZS-1), as an elliptical-inclined-geosynchronous-orbit (EIGSO)

satellite, and Compass-G1, as a geostationary-orbit (GEO) satellite. Because the number of SLR tracking data has a significant influence on the precision of OD, this study selected the OD arc that maximizes the number of NPs. Also, two different methods of station bias estimation were implemented to analyze the associated effect on OD precision.

Section 2 of this paper describes the detailed information of each satellite and analyzes the SLR tracking data. For the OD of QZS-1, weight parameters of each SLR tracking station are adjusted by reflecting the quality of the measurements. Also, different settings of station bias estimation are set to enhance OD precision. As it is difficult to obtain a large amount of SLR tracking data for Compass-G1 on GEO compared with the case of QZS-1, the number of estimation parameters is reduced in the filtering process. The OD results of the two satellites in the given periods and their associated orbit overlap analyses are given in Section 3. Section 4 draws conclusions.

2. SLR-BASED ORBIT DETERMINATION

2.1 Overview of QZS-1

QZS-1 (Michibiki), the first satellite of the Japanese QZSS, was launched in September 2010 for technical validation of navigation satellites. Table 1 presents the mission parameters of QZS-1. The primary mission objective of its SLR is to calibrate the GPS-based orbit. Its orbit is set as EIGSO to maximize the satellite's visibility from Japan. It has an eccentricity of 0.075 and an inclination of 45°, resulting in altitude change between 32,000 km and 40,000 km. Fig. 1 shows the ground tracks of QZS-1. The large inclination/eccentricity leads to an asymmetric figure-8shaped ground track.

Due to its local ground track, only those SLR tracking stations

Table 1. QZS-1 mission parameters (ILRS 2017a)

Parameter	Value
Launch date	2010-09-11
Sponsor	Cabinet Office, Government of Japan
Expected life	12 years
Primary applications	Technology demonstration for satellite navigation
Primary SLR applications	Calibration of GPS orbits
NP bin size	300 sec
Altitude	32,000-40,000 km
Inclination	45°
Eccentricity	0.075



Fig. 1. Ground track of QZS-1 (Image courtesy of JAXA).

Table 2. Current SLR tracking statistics of QZS-1 (as of November 16, 2017) (ILRS 2017b)

Station Name	Station Number	Start Date	End Date	No. Passes	No. Points
Beijing	7249	2012-04-25 17:04:12	2017-08-04 13:25:14	41	177
Changchun	7237	2011-03-21 15:19:03	2017-11-03 21:19:01	1,056	3,370
Koganei	7308	2010-12-01 08:19:43	2014-03-11 18:04:30	254	1,581
Mount Stromlo	7825	2010-12-22 15:02:46	2017-11-10 18:36:00	295	952
Shanghai	7821	2010-12-05 11:19:28	2017-10-28 12:06:27	250	997
Tanegashima	7358	2010-12-02 13:38:35	2012-04-07 12:27:43	102	498
Yarragadee	7090	2010-11-30 15:58:57	2017-11-13 15:52:04	1,182	3,617

Table 3. Compass-G1 mission parameters (ILRS 2012a)

Parameter	Value
Launch date	2010-01-17
Sponsor	Chinese Defense Ministry
Expected life	3 years
Primary applications	Positioning
Primary SLR applications	Precision orbit determination
NP bin size	300 sec
Altitude	35,792.9 km
Inclination	1.53°
Eccentricity	0.00018

located in East Asia and Australia can obtain stable laser tracking data of QZS-1. QZS-1 can be successfully observed from seven SLR tracking stations: Beijing, Changchun, Koganei, Mount Stromlo, Shanghai, Tanegashima, and Yarragadee. Table 2 presents the detailed station information and tracking statistics. Among the seven stations, the Changchun and Yarragadee stations have contributed the main proportion of the SLR tracking data. Although Koganei contributed 15.04 % of the whole NPs, tracking procedures at this station have been suspended since March 11, 2014.

2.2 Overview of Compass-G1

China has been establishing its own GNSS, called the Beidou navigation satellite system (BDS), in three phases of the development. The first stage of BDS, also known as the Beidou navigation satellite demonstration system (BDS-1), was established to implement the regional radio determination satellite service. The second stage (BDS-2) initiated the first MEO satellite in 2007 and declared the beginning of the regional navigation satellite system (RNSS) in 2012 with 6 GEO, 5 inclined-geosynchronous-orbit (IGSO), and 5 MEO satellites. The current BDS-2 satellites will be a part of the third stage of BDS (BDS-3) for constructing the GNSS by 2020 (Yang et al. 2017). The whole constellation of BDS-3 will consist of 27 MEO, 3 IGSO, and 5 GEO satellites. Currently, 3 MEO, 5 IGSO, and 1 GEO satellites are functioning with a laser retro-reflector array (LRA) payload.

Compass-G1, the first GEO satellite of BDS-2, was launched in January 2010 to provide positioning service for both military

and civilian users in East Asia. Table 3 presents the mission parameters of Compass-G1. Due to its high altitude, its NP bin size is the same as that of QZS-1. The primary SLR application is precise OD. Note that the eccentricity and inclination are both near zero compared with those of QZS-1 to achieve GEO characteristics.

As Compass-G1 is GEO, fewer SLR tracking data are available. Table 4 summarizes the information of tracking stations. The Changchun station acquired most of the SLR tracking data, and the San Juan station and the Komsomolsk station rarely tracked Compass-G1. This was due to the relatively low elevation angle. As presented in Fig. 2, the ground track of Compass-G1 is fixed at a point, and the locations of the San Juan and Komsomolsk stations are far from the satellite.

2.3 Model/Parameter Settings

In this study, GEODYN II, developed by NASA GSFC, was used to obtain the OD solution (Pavlis et al. 1998). The GEODYN II consists of an orbital dynamics model, a measurement model, and an estimation filter based on batch least-square. Table 5 shows the associated parameter settings of the OD. This study adopted a stations' coordinate system, updated in 2013, based on the SLRF2005 coordinate system. The equations of motion of satellite contain central gravity and a variety of perturbations (Tapley et al. 2004):

$$\ddot{\vec{r}} = -\frac{\mu}{r^3}\vec{r} + \vec{a}_{perturb} \quad (1)$$

Here, $\vec{a}_{perturb}$ contains the effects of the non-spherical gravity of the Earth, the gravity of the celestial bodies in the solar system, solar radiation pressure, and atmospheric perturbations. For celestial bodies, the Moon, the Sun, and all planets are included from the JPL DE-403 planetary ephemeris information. The attitude model of the satellites is set as the cannonball model, because their specific attitude profiles are unknown.

The measurement model of SLR consists of the geometric relationship defined by observation, measurement bias, and timing bias of the tracking stations (Pavlis et al. 1998):

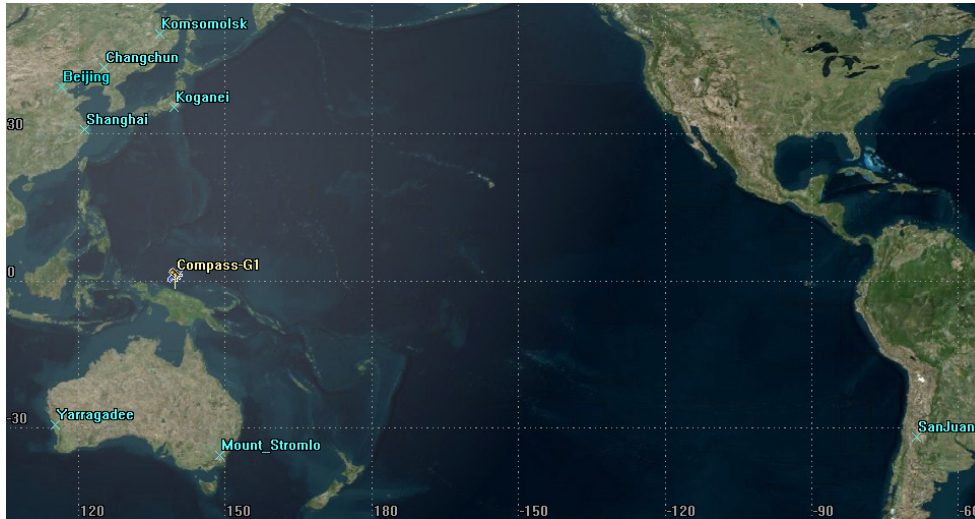


Fig. 2. Ground track and SLR tracking stations of Compass-G1.

Table 4. Current SLR tracking statistics of Compass-G1 (as of November 16, 2017) (ILRS 2012b)

Station Name	Station Number	Start Date	End Date	No. Passes	No. Points
Beijing	7249	2012-05-25 18:32:20	2017-05-14 19:20:54	21	110
Changchun	7237	2012-04-28 15:34:23	2017-11-14 20:43:59	1,363	4,477
Koganei	7308	2012-08-31 10:28:55	2014-03-12 09:58:31	23	119
Komsomolsk	1868	2014-09-25 15:37:49	2017-11-12 09:05:28	16	40
Mount Stromlo	7825	2012-05-11 09:17:16	2017-10-21 10:53:44	57	159
San Juan	7406	2012-05-08 00:07:24	2012-05-15 09:48:57	3	22
Shanghai	7821	2012-07-22 14:35:32	2017-11-08 20:42:38	282	1,399
Yarragadee	7090	2012-04-30 16:21:33	2017-11-13 19:24:58	616	2,019

Table 5. Dynamic model and parameter settings of the OD process

Model/parameter	Description	References
Earth gravity	GGM02C 30x30	Tapley et al. 2005
Third body gravity	Moon, Sun, and all planets	
Planetary ephemeris	JPL DE-403	Standish et al. 1995
Atmospheric model	Jacchia 1971	Jacchia 1971
SLR station coordinates	ITRF2005	Altamimi et al. 2007
Solar radiation pressure	CR coefficient = 1.13	
Numerical integration	Cowell's 11th method Step size = 300 sec	

$$C_{t+\Delta t} = f_t(\vec{r}, \dot{\vec{r}}, \vec{r}_{obs}) + b + \dot{f}_t(\vec{r}, \dot{\vec{r}}, \vec{r}_{obs})\Delta t \quad (2)$$

Here, $C_{t+\Delta t}$ denotes the computed observation at time $t+\Delta t$, $f_t(\vec{r}, \dot{\vec{r}}, \vec{r}_{obs})$ is the geometric relationship defined by the Earth-fixed position vector of the satellite \vec{r} , the velocity vector $\dot{\vec{r}}$, and the Earth-fixed position vector of the station \vec{r}_{obs} , b is a constant bias on the measurement, and Δt is the timing bias associated with the measurement.

2.4 SLR Tracking Data

To observe QZS-1 and obtain a sufficient number of NPs, JAXA conducted a tracking campaign from February 25 to

March 7, 2013 (Kasho et al. 2013). To take full advantage of the observed data during this campaign period, this study set the OD arc of QZS-1 to be the same period. During this time span, 105 NPs were freely distributed online by ILRS, and 269 unpublished NPs were also available courtesy of JAXA (Table 6). This period was divided into two single-week arcs with overlap, March 1 to March 7 and March 2 to March 8, to perform the orbit overlap for internal quality assessment. Due to the relatively small amount of tracking data, all the NPs obtained from March 1 to March 8, 2013 were used for OD.

Unlike QZS-1, the whole NPs for Compass-G1 are accessible online for selected OD arcs. Therefore, the optimal OD arc that maximizes the number of NPs was searched from the whole

Table 6. Number of NPs of QZS-1 (from March 1 to March 8, 2013)

Date	Station Number	No. NPs (Published)	No. NPs (Unpublished)
3/1	7090, 7237	16	-
3/2	7090, 7237, 7308, 7358	19	29
3/3	7090, 7358, 7821	9	50
3/4	7090, 7358	3	16
3/5	7090, 7237, 7308, 7358	20	45
3/6	7090, 7308, 7358	20	71
3/7	7090, 7308, 7358	15	58
3/8	7821	3	-
Total	7090, 7237, 7308, 7358, 7821	105	269

Table 7. Number of NPs of Compass-G1 (from January 1 to January 10, 2016)

Date	Station Number	No. NPs
1/1	7237	4
1/2	7237	9
1/3	7237	7
1/4	-	-
1/5	7237	11
1/6	7237	6
1/7	7237	12
1/8	7090, 7237	21
1/9	-	-
1/10	-	-
Total	7090, 7237	68

tracked period from year 2012 to 2017. After the comparison, the OD arc from January 1 to January 10, 2016, was selected for Compass-G1. Similarly, in the case of QZS-1, this period was divided into two arcs with overlap: January 1 to January 7 and January 4 to January 10. Table 7 presents the number of NPs in this arc. Despite successful observations of Compass-G1 by eight stations during the entire tracking period, as shown in Table 4, only the Changchun and Yarragadee stations tracked Compass-G1 in this period. The Changchun station obtained most of the NPs, but the Yarragadee station obtained three NPs.

2.5 Orbit Overlap Method

In this study, the orbit overlap method was utilized to internally assess the OD quality of QZS-1 and Compass-G1 because their true (exact) orbit is unknown. The orbit overlap method is one of the quantitative indicators of estimated orbit precision (Tapley et al. 2004). Fig. 3 shows the concept of the orbit overlap for QZS-1 and Compass-G1, respectively. The OD of each arc was performed separately, and the OD results were compared with each other for the overlap period. In this study, the overlap orbits were directly compared with each other every 5 minutes. For the whole eight-day period of QZS-1, two single-week OD arcs were selected, and there were six overlap days. Similarly, Compass-G1 had four overlap days: January 4 to January 7,

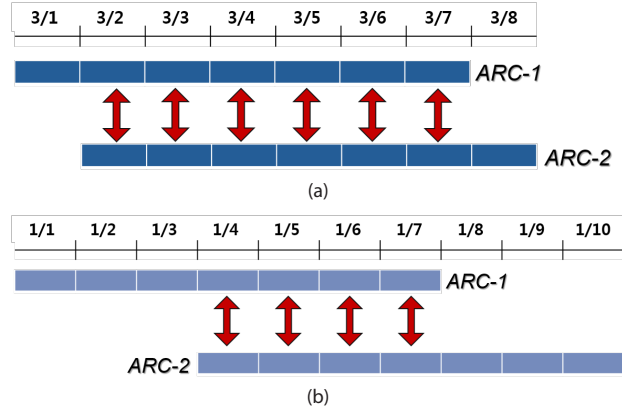


Fig. 3. Concept of orbit overlap: (a) QZS-1, (b) Compass-G1.

2016.

3. ORBIT DETERMINATION RESULTS

3.1 QZS-1 Orbit Determination

GEODYN II possesses two kinds of station timing bias estimation settings. The MBIAS setting estimates the biases once in an OD period, whereas the PBIAS setting determines them at every pass (Pavlis et al. 2006). The expected OD precision is higher when using PBIAS than when using MBIAS because the timing biases may change for each pass. However, when only published NPs are used, the OD of QZS-1 using the PBIAS setting fails because of an insufficient number of NPs. When unpublished NPs are added, the OD can be successfully achieved using PBIAS. Also, the weighting sigma of each station should be adjusted differently to improve the performance of the OD results. The ILRS Analysis Centers (ACs) publishes monthly/quarterly performance reports of tracking stations. The ACs estimate SLR tracking quality by obtaining the NP RMS of the LAGEOS-1 satellite. Five ACs issued performance reports in March 2013, and this study followed the results of the Mission Control Center (MCC) AC because the MCC is the only AC to distribute tracking performance results for the Koganei station. Regarding the analysis reports, among the QZS-1 tracking stations, the Yarragadee station obtained the best SLR tracking quality, whereas the Shanghai/Beijing/Koganei stations provide relatively degraded data during this period. These results were applied to the sigma weighting strategy for QZS-1 OD to set the weight parameters for the Yarragadee and Shanghai/Beijing/Koganei stations as 1 and 10, respectively.

Table 8 presents the post-fit observation-calculated-observation (O-C) residual of QZS-1 for the two arcs with the MBIAS setting. The post-fit residual for arc 1 (March 1-

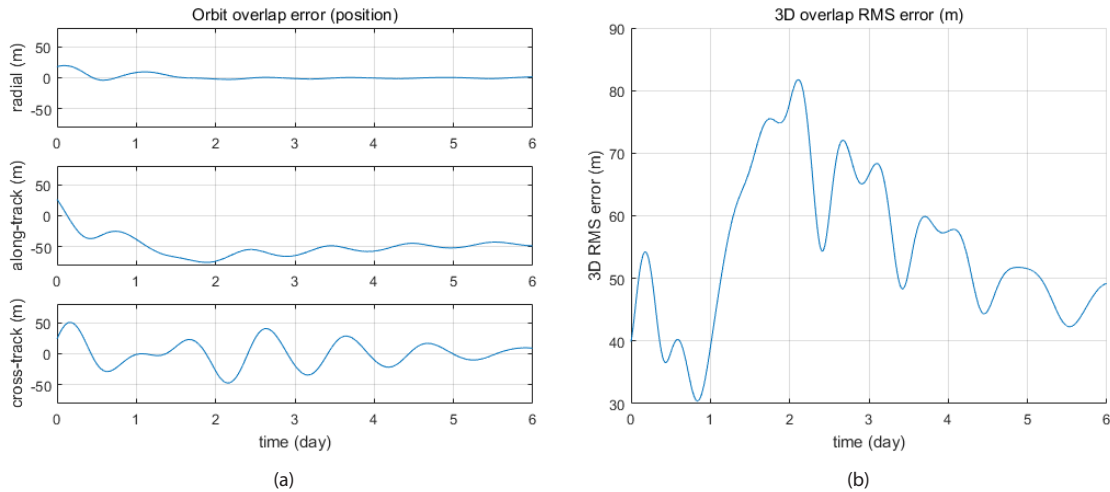


Fig. 4. Orbit overlap error of QZS-1 (MBIAS): (a) RTN coordinates, (b) 3-dimensional.

Table 8. O-C residuals of QZS-1 for each tracking station (MBIAS)

Station	Station Number	No. NPs (arc 1)	O-C Residual (arc 1)	No. NPs (arc 2)	O-C Residual (arc 2)
Tanegashima	7358	267	7.86 cm	262	6.33 cm
Koganei	7308	44	9.15 cm	44	9.70 cm
Yarragadee	7090	37	29.87 cm	33	28.20 cm
Changchun	7237	15	6.68 cm	0	rejected
Shanghai	7821	5	0.84 cm	8	6.49 cm
Total	7090, 7237, 7308, 7358, 7821	368	11.98 cm	347	10.77 cm

Table 9. Orbit overlap results of QZS-1 (MBIAS)

Overlap Period	Radial Error (RMS)	Along-Track Error (RMS)	Cross-Track Error (RMS)	Mean RMS Error
3/2/2013-3/7/2013	4.839 m	52.029 m	21.053 m	55.013 m

Table 10. O-C residuals of QZS-1 for each tracking station (PBIAS)

Station	Station Number	No. NPs (arc 1)	O-C Residual (arc 1)	No. NPs (arc 2)	O-C Residual (arc 2)
Tanegashima	7358	269	3.56 cm	269	2.55 cm
Koganei	7308	44	3.36 cm	44	1.48 cm
Yarragadee	7090	37	4.96 cm	33	2.63 cm
Changchun	7237	16	1.84 cm	4	0.50 cm
Shanghai	7821	5	0.45 cm	8	0.43 cm
Total	7090, 7237, 7308, 7358, 7821	371	3.60 cm	358	2.40 cm

March 7, 2013) with 368 NPs is 11.98 cm, and that for arc 2 (March 2–March 8, 2013) with 347 NPs is 10.77 cm. Three and 11 NPs were rejected from arc 1 and arc 2, respectively, for the OD based on the MBIAS setting. The average residual between the two arcs is 11.375 cm. Changchun station’s NPs were rejected for the OD of arc 2 with the MBIAS setting. The OD results of the two arcs were directly compared with each other by overlap. Fig. 4 and Table 9 show the position differences for the six overlap days. Fig. 4 presents the overlap error in the Earth-centered radial-tangential-normal (RTN) coordinate system and the 3-dimensional overlap errors for the whole period. The overlap differences in RTN coordinates are 6.839 m, 52.029 m, and 21.053 m, and the mean RMS error with the MBIAS setting is 55.013 m.

Table 10 shows the QZS-1 OD results of the two arcs with the PBIAS setting. The post-fit O-C residual for arc 1 with 371 NPs is 3.60 cm, and that for arc 2 with 358 NPs is 2.40 cm. The average residual of the two arcs is 3 cm. The O-C residuals of two arcs’ OD decrease when station biases are estimated more frequently. As the SLR residual of the QZS-1 satellite presented in Akiyama & Otsubo (2012) was 17.9 cm on average for three different 5-7 day-long arcs, the residual obtained from this study is acceptable. Fig. 5 and Table 11 show the position differences for the six overlap days with the PBIAS setting. The overlap errors decreased significantly with the PBIAS setting, which yielded 0.214 m, 1.004 m, and 1.672 m in the RTN coordinate system. The mean RMS error with PBIAS is 1.962 m, which is 28 times smaller than that

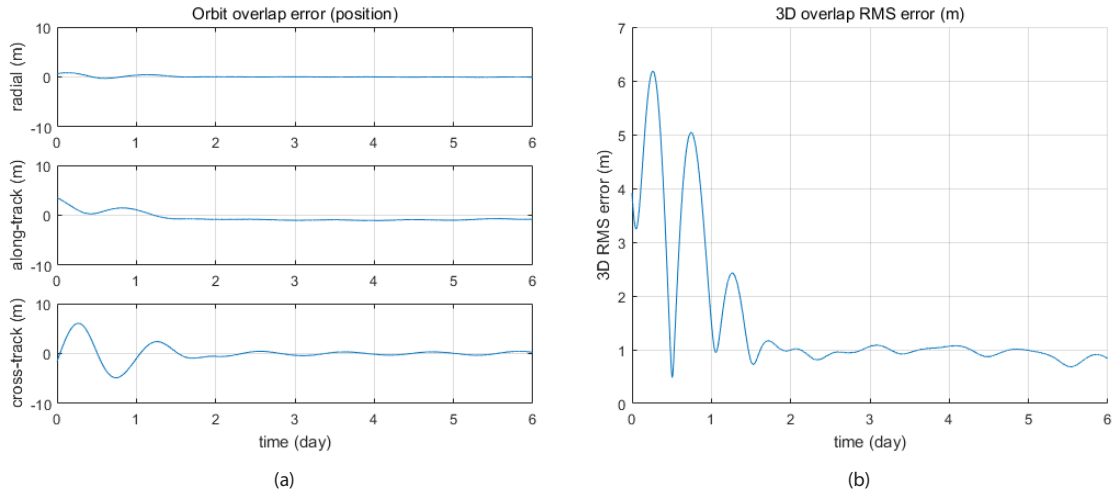


Fig. 5. Orbit overlap error of QZS-1 (PBIAS): (a) RTN coordinates, (b) 3-dimensional.

Table 11. Orbit overlap results of QZS-1 (PBIAS)

Overlap Period	Radial Error (RMS)	Along-Track Error (RMS)	Cross-Track Error (RMS)	Mean RMS Error
3/2/2013-3/7/2013	0.214 m	1.004 m	1.672 m	1.962 m

Table 12. O-C residuals of Compass-G1 for each tracking station

Station	Station Number	No. NPs (arc 1)	O-C Residual (arc 1)	No. NPs (arc 2)	O-C Residual (arc 2)
Changchun	7237	49	8.81 cm	47	12.00 cm

with MBIAS; it is effective for enhancing the precision of OD to estimate the station bias at every pass.

3.2 Compass-G1 Orbit Determination

Given that only 68 NPs are available, the PBIAS setting is not applicable to OD for Compass-G1, unlike the case of OD for QZS-1. The total number of estimation parameters for the OD of Compass-G1 reaches 122 with the PBIAS setting, whereas it is only 22 with the MBIAS setting. Furthermore, the sigma weighting strategy is also unavailable because only one station, Changchun, provides most of the NPs for Compass-G1, and the Yarragadee station provides the minimal number of NPs. As the NPs from the Yarragadee station were obtained on January 8, they could be used for only the second arc (January 4 to January 10). If these NPs were included in the OD of Compass-G1, the OD precision would be degraded. Therefore, these NPs were removed in the OD process for consistency.

The Compass-G1 OD results with consideration of the above NP issue are presented in Table 12. The post-fit O-C residual for arc 1 (January 1 to January 7, 2016) with 49 NPs is 8.81 cm, and that for arc 2 (January 4 to January 10, 2016) with 47 NPs is 12.00 cm. The corresponding OD precision is lower compared with that of QZS-1, as the number of NPs is lower. This reduction in precision is clearly seen in the orbit

overlap results. Fig. 6 and Table 13 show that the errors are 18.957 m, 75.651 m, and 160.476 m in RTN coordinates for the four-day overlap period. Also, the 3-dimensional mean overlap error reaches 160.564 m. These results indicate that a reduction in estimation parameters such as timing biases induces a significant increase in orbit overlap error, even with a quite precise O-C residual.

4. CONCLUSIONS

OD was performed on HEO satellites using sparse SLR measurements. Two satellites, QZS-1, with an elliptical-inclined-geosynchronous orbit, and Compass-G1, with a geostationary orbit (GEO), were selected. NASA GSFC GEODYN II software was utilized to perform the OD using NP SLR observations. The periods of OD arcs were selected carefully to maximize the number of NPs. While performing the OD for week-long arcs, the overlap days of two arcs were directly compared to obtain orbit overlap results for efficient internal quality assessment of estimated orbit. For QZS-1, both MBIAS and PBIAS were selected to estimate the SLR tracking stations' timing biases, and the sigma weighting strategy was applied to give different weights according to the tracking performance of stations. The resultant post-fit position residuals of QZS-1 were 11.375

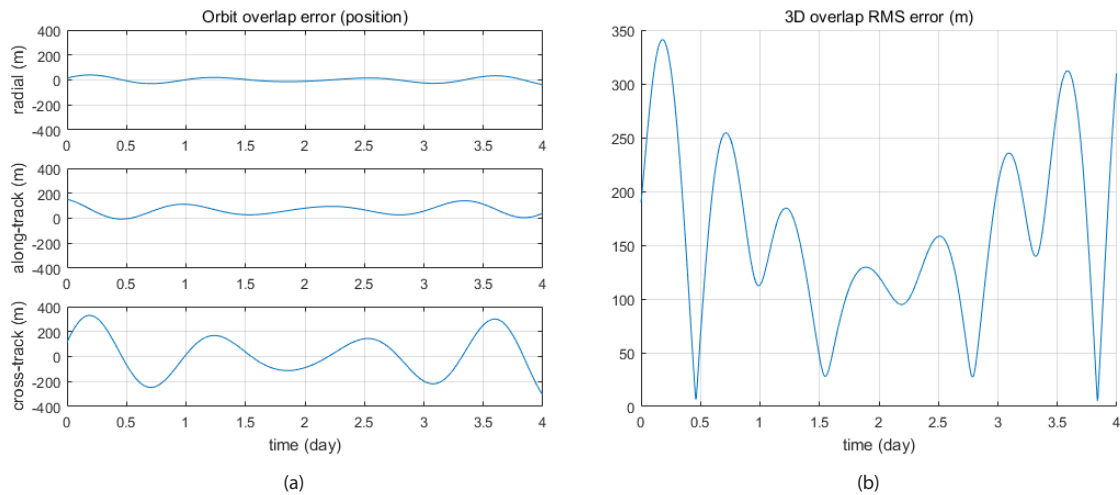


Fig. 6. Orbit overlap error of QZS-1 (PBIAS): (a) RTN coordinates, (b) 3-dimensional.

Table 13. Orbit overlap results of Compass-G1

Overlap Period	Radial Error (RMS)	Along-Track Error (RMS)	Cross-Track Error (RMS)	Mean RMS Error
1/4/2016~1/7/2016	18.957 m	75.561 m	160.475 m	160.564 m

cm and 3 cm on average for two arcs with the MBIAS and PBIAS setting, respectively, and the resultant 3-dimensional mean overlap error decreased from 55.013 m (MBIAS) to 1.691 m (PBIAS). For Compass-G1, because the Changchun station was the only station capable of producing NPs, the number of NPs was quite low compared with the case of QZS-1. Therefore, only the MBIAS setting was applied to the OD of Compass-G1, and the sigma weighting strategy for tracking stations was not applied. The result yielded a mean O-C residual of 10.405 cm and an average overlap error of 160.564 m. The significantly large orbit error of Compass-G1 implies that estimating the pass-by-pass bias and applying the sigma weighting strategy with enough NPs from different tracking stations is critical for enhancing the precision of OD. The OD results of Compass-G1 also indicate that there must be a reduction in other estimation parameters such as solar radiation pressure or general acceleration to estimate the pass-by-pass bias with a small amount of data. As more frequent estimation of station bias makes improves OD quality, a trade-off study considering the selection of the PBIAS setting and other estimation parameters will be necessary to improve OD precision. Also, progressing a satellite-tracking campaign by several stations can be an alternative to increasing the number of NPs in a short period and therefore to improving OD precision. The OD strategy presented in this study is applicable to continuous orbit monitoring of HEO satellites.

ACKNOWLEDGMENTS

This research was supported by the Geostationary Earth Orbit Korea Multi-Purpose Satellite Development program (Project No. 2011-0030431) supervised by the Ministry of Science and ICT. We especially appreciate JAXA for providing unpublished SLR tracking data for the 2nd QZS-1 tracking campaign period (February 25 to March 7, 2013).

REFERENCES

- Akiyama K, Otsubo T, Accuracy evaluation of QZS-1 orbit solutions with satellite laser ranging, in the International Technical Laser Workshop 2012 (ITLW-12), Rome, Italy, 5-9 Nov 2012.
- Altamimi Z, Collilieux X, Legrand J, Garayt B, Boucher C, ITRF2005: A new release of the International Terrestrial Reference Frame based on time series of station positions and Earth Orientation Parameters, *J. Geophys. Res.* 112, B09401 (2007). <https://doi.org/10.1029/2007JB004949>
- Appleby GM, Bianco G, Noll CE, Pavlis EC, Pearlman MR, Current trends and challenges in satellite laser ranging, International VLBI Service for Geodesy and Astrometry 2016 General Meeting Proceedings: New Horizons with VGOS, eds. Behrend D, Baver KD, Armstrong KL (NASA, Greenbelt, 2016), 15-24.
- ILRS (International Laser Ranging Service), COMPASS [Internet], cited 2012a Sep 28, available from: <https://ilrs.cddis.eosdis>.

- nasa.gov/missions/satellite_missions/current_missions/cmgl_general.html
- ILRS (International Laser Ranging Service), COMPASS: Mission Support [Internet], cited 2012b Sep 28, available from: https://ilrs.cddis.eosdis.nasa.gov/missions/satellite_missions/current_missions/cmgl_support.html
- ILRS (International Laser Ranging Service), QZSS [Internet], cited 2017a Jun 1, available from: https://ilrs.cddis.eosdis.nasa.gov/missions/satellite_missions/current_missions/qzs1_general.html
- ILRS (International Laser Ranging Service), QZSS: Mission Support [Internet], cited 2017b Jun 1, available from: https://ilrs.cddis.eosdis.nasa.gov/missions/satellite_missions/current_missions/qzs1_support.html
- Jacchia LG, Revised static models of the thermosphere and exosphere with empirical temperature profiles, *SAO Spec. Rep.* 332 (Smithsonian Institution, Cambridge, 1971).
- Kasho S, Akiyama K, Mori A, Nakamura S, A report on JAXA Tanegashima station (GMSL), Proceedings of the 18th International Workshop on Laser Ranging, Fujiyoshida, Japan, 11-15 Nov 2013.
- Kim YR, Park ES, Park SY, Choi KH, Hwang YL, et al., Validation of GPS based precise orbits using SLR observations, *J. Astron. Space Sci.* 26, 89-98 (2009). <https://doi.org/10.5140/JASS.2009.26.1.089>
- Kim YR, Park E, Kucharski D, Lim HC, Orbit determination using SLR data for STSAT-2C: Short-arc analysis, *J. Astron. Space Sci.* 32, 189-200 (2015). <https://doi.org/10.5140/JASS.2015.32.3.189>
- Maier A, Sušnik A, Arnold D, Sośnica K, Dach R, et al., Validation of GNSS orbits using Satellite Laser Ranging data, in the 26th International Union of Geodesy and Geophysics (IUGG) General Assembly, Prague, Czech Republic, 22 Jun - 2 Jul 2015.
- Montenbruck O, Gill E, *Satellite Orbits: Models, Methods and Applications* (Springer, New York, 2010).
- Montenbruck O, Steigenberger P, Kirchner G, GNSS Satellite Orbit Validation Using Satellite Laser Ranging, Proceedings of the 18th International Workshop on Laser Ranging, Fujiyoshida, Japan, 11-15 Nov 2013.
- Otsubo T, Appleby GM, Gibbs P, GLONASS laser ranging accuracy with satellite signature effect, *Surv. Geophys.* 22, 506-516 (2001). <https://doi.org/10.1023/A:1015676419548>
- Pavlis DE, Luo S, Dahiroc P, McCarthy JJ, Luthcke SB, GEODYN II System Description, Contractor Report (Hughes STX, Greenbelt, 1998).
- Pavlis DE, Poulouse SG, McCarthy JJ, GEODYN Operations Manuals, Contractor Report (SGT Inc., Greenbelt, 2006).
- Plotkin HH, Johnson TS, Spadin PL, Moye J, Reflection of ruby laser radiation from explorer XXII, *Proc. IEEE* 53, 301-302 (1965). <https://doi.org/10.1109/proc.1965.3694>
- Sośnica K, Thaller D, Dach R, Steigenberger P, Beutler G, et al., Satellite laser ranging to GPS and GLONASS, *J. Geod.* 89, 725-743 (2015). <https://doi.org/10.1007/s00190-015-0810-8>
- Standish EM, Newhall XX, Williams JG, Folkner WF, JPL planetary and Lunar ephemerides, DE403/LE403, JPL Inter Office Memorandum (IOM), 314.10-127 (1995).
- Tapley BD, Schutz BE, Born GH, *Statistical Orbit Determination* (Academic Press, Cambridge, 2004).
- Tapley BD, Ries JC, Bettadpur S, Chambers D, Cheng M, et al., GGM02-an improved Earth gravity field model from GRACE, *J. Geod.* 79, 467-478 (2005). <https://doi.org/10.1007/s00190-005-0480-z>
- Urschl C, Gurtner W, Hugentobler U, Schaer S, Beutler G, Validation of GNSS orbits using SLR observations, *Adv. Space Res.* 36, 412-417 (2005). <https://doi.org/10.1016/j.asr.2005.03.021>
- Urschl C, Beutler G, Gurtner W, Hugentobler U, Schaer S, Contribution of SLR tracking data to GNSS orbit determination, *Adv. Space Res.* 39, 1515-1523 (2007). <https://doi.org/10.1016/j.asr.2007.01.038>
- Yang Y, Tang J, Montenbruck O, Chinese Navigation Satellite Systems, in Springer Handbooks Series, Global Navigation Satellite Systems, eds. Teunissen PJG, Montenbruck O (Springer, Heidelberg, 2017), 273-304. https://doi.org/10.1007/978-3-319-42928-1_10
- Zhu SY, Reigber C, Kang Z, Apropos laser tracking to GPS satellites, *J. Geod.* 71, 423-431 (1997). <https://doi.org/10.1007/s001900050110>

